




PIPE OUTLET INSTALLATION

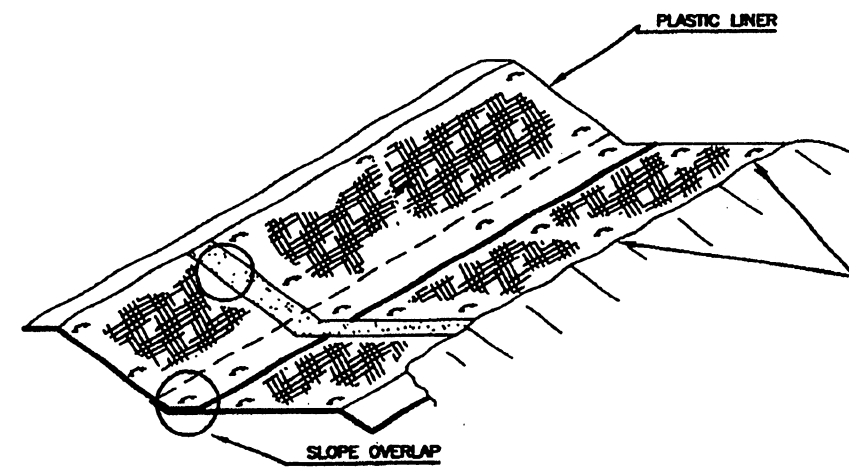


V DITCH INSTALLATION

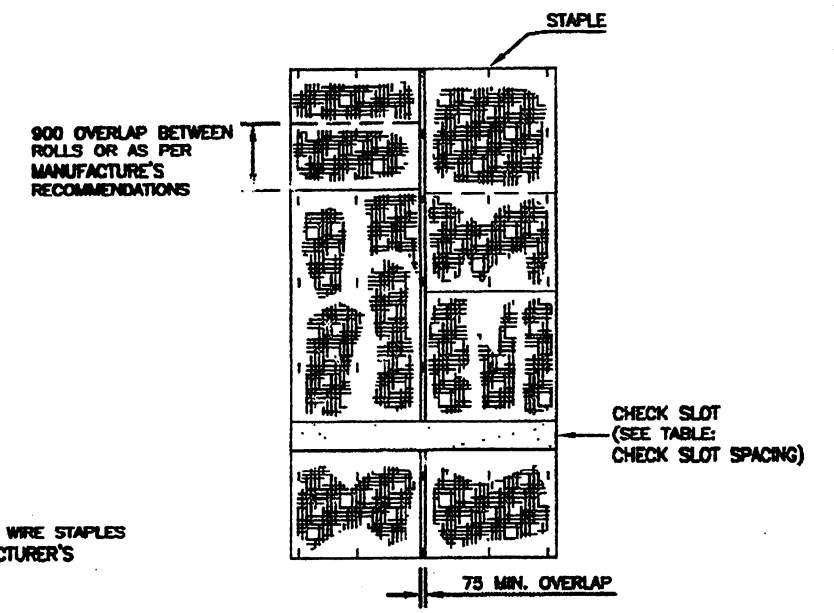

PLAN VIEW STAPLING DIAGRAM

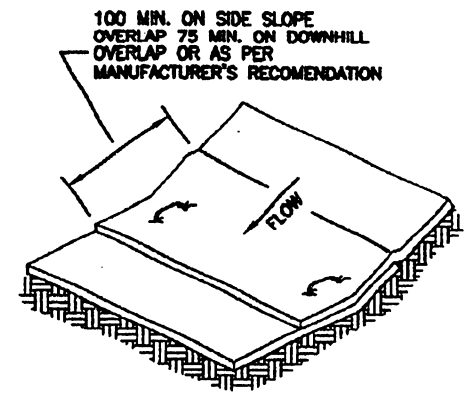


SLOPE OVERLAP

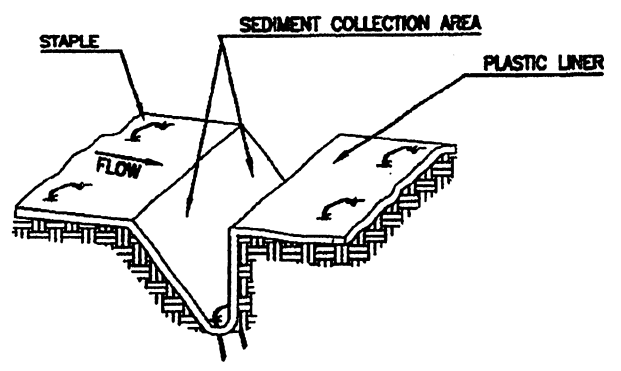


CHECK SLOT

CHECK SLOT SPACING	
SLOPE	SPACING
LESS THAN 4%	30 M
4% OR MORE	15 M

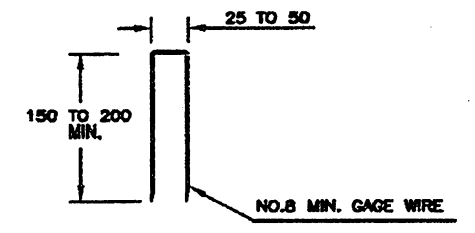


200 STAPLE MINIMUM LENGTH FOR SANDY SOIL
150 STAPLE MINIMUM LENGTH FOR OTHER SOIL.

WIRE STAPLE DETAIL

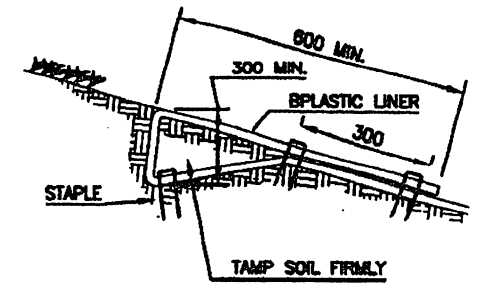

UPPER TERMINAL ANCHOR

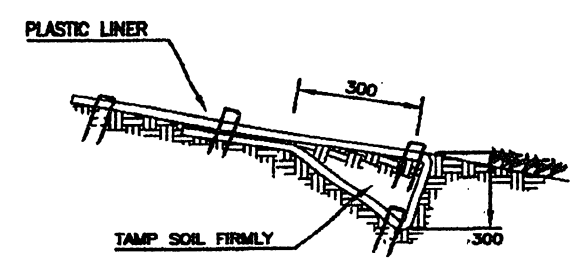

LOWER TERMINAL ANCHOR

NOTE:

1. PLASTIC LINER SHALL CONFORM TO THE REQUIREMENTS OF STANDARD SPECIFICATION 210 - SOIL EROSION AND WATER POLLUTION CONTROL.
2. CHECK SLOT TO BE CONSTRUCTED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATION FOR PREFERRED INSTALLATION.
3. ALL DIMENSIONS SHOWN ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED.

EFFECTIVE DATE: OCTOBER 1998

COMMONWEALTH OF PUERTO RICO
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS
HIGHWAY AND TRANSPORTATION AUTHORITY

**EROSION CONTROL
SLOPE PROTECTION
PLASTIC LINER INSTALLATION**

RECOMMENDED BY: *[Signature]*
DESIGN AREA DIRECTOR
DATE: *6-1-98*

APPROVED BY: *[Signature]*
EXECUTIVE DIRECTOR
DATE: *8-27-98*

APPROVED BY: *[Signature]*
DIV. ADM. PLAN-PR DIVISION
DATE: *12-9-98*

DATE	REVISION	BY

STD. DWG. ER 17 OF 20